




6. Start the MirrorOp (Sender) App

- Make sure that the MirrorOp app is not blocked by your firewall.

1) Double click on the MirrorOp icon  on the desktop or from the Applications folder to execute the MirrorOp app. The MirrorOp app will start to search for the WiPG-1000 automatically. (If not, you can click  or input the hostname/IP in the textbox to connect to the device.)




Windows




Mac


2) Click on the WiPG-1000 and enter the passcode (login code) shown on the standby screen of the projector/display.




Windows




Mac

3) Click  and start sharing your screen.



Windows



Mac

Note:

- See the User's Manual for more information. You can download the User's Manual (PDF file) from <http://www.mirrorop.com/WiPG-1000/>.
- The MirrorOp (Presenter) app for iOS and Android devices can be downloaded from the Apple App Store or Google Play Store.

Warranty Policy:

For warranty terms and conditions, please visit our website at: <https://www.barco.com/en/about-barco/legal/warranty-policy>.



wePresent

WiPG-1000

Quick Start Guide | Version: 3.00

Manufacturer: Barco NV
President Kennedypark 35, 8500 Kortrijk, BELGIUM
+32 56 233211

Importer: Barco NV
President Kennedypark 35, 8500 Kortrijk, BELGIUM
+32 56 233211

ENABLING BRIGHT OUTCOMES

BARCO

BARCO

1. Package Contents


- wePresent WiPG-1000 (Base Unit)
- Power Adapter (DC +5V, 2.6A)
[Manufacturer: ENG ELECTRIC CO. LTD./
Model: 6A-161WP05]
- Two Detachable WiFi Antennas
- Wall-Mount Kit
- Quick Start Guide
- Safety Guide



2. Physical Details

- Front Panel

Power Button/ LED Indicator	Power on/off button, LED indicator: red - system loading, green - system ready
USB Port (Front)	2 USB ports for USB mouse/keyboard/thumb drive

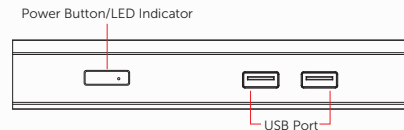

- Rear Panel

WiFi Antennas	Two detachable antennas for better WiFi performance
USB Port (Rear)	USB port for USB mouse/keyboard/ thumb drive/IWB device (HID type)
Ethernet Port	10/100M RJ-45 port
VGA Port	For VGA projector/display
HDMI Port	For HDMI projector/display
Audio Jack (3.5mm)	For speaker
Power Jack (5V/2.6A)	For power adapter


- * The USB port can only supply up to 5V/0.5A to the USB thumb drive/
mouse/keyboard/IWB device.
- * Operation temperature: 0-40°C
- * PoE rating: 37-57V/350mA

- Bottom Side


Reset Button	For hard reset
--------------	----------------

- *** To perform a hard reset to restore your WiPG-1000 device to the factory default settings, please follow the below procedures:

 1. Long press the reset button and hold.
 2. Turn on the WiPG-1000 and wait for over 10 seconds until the LED indicator turns green.
 3. Release the reset button.
 4. The WiPG-1000 will be restored to the factory default settings.

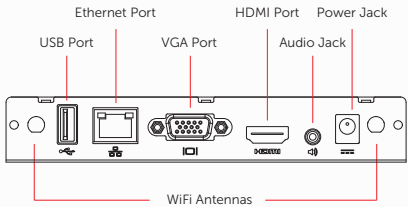

- ⚠ The power supply shall comply with the LPS (Limited Power Source) requirements.

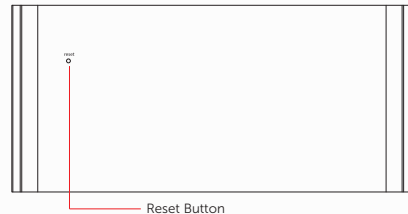

3. What You (Might) Need

- Projector/display with VGA/HDMI interface (Required)
- Ethernet cable (Required if you want to disable the WiFi of the WiPG-1000)
- Windows or Mac computer
- Apple iPhone, iPad or iPod touch
- Android phone or tablet
- Speaker
- USB mouse/keyboard
- USB HID IWB device

4. Hardware Installation

- 1) Connect the WiPG-1000 to the projector/display through the VGA/HDMI port and turn on the projector/display power.
- 2) Connect the power adapter to the WiPG-1000 and press the power button to turn on the device. The system is ready when the LED indicator turns green.
- 3) If you disable the WiFi of the WiPG-1000, you need to connect the device to an existing IT network through an Ethernet cable.
- 4) Insert the speaker cable to the WiPG-1000 audio jack for audio output. (A speaker is required for audio output when using VGA.)
- 5) Insert the USB mouse/keyboard/IWB device to the WiPG-1000 front/rear USB port for OSD (On-Screen Display) control or remote control.

5. Download the MirrorOp (Sender) App

- **Windows Phone/Windows RT not supported by MirrorOp**

- 1) Make sure your PC/Mac is WiFi-enabled, and connect your PC/Mac to the WiPG-1000 through WiFi. You can find the WiFi network name (SSID) of your WiPG-1000 device on the standby screen of the projector/display. [Default SSID is WiPG-1000-xxx (xxx are the last three characters of the MAC ID shown on the bottom of the WiPG-1000)]
- 2) Open the browser of your computer, and enter the IP address or the device hostname in the address bar of the browser. You can find the IP address and hostname on the standby screen of the projector/display. [Default IP address is 192.168.100.10; default hostname is WiPG-1000-xxx (xxx are the last three characters of the MAC ID shown on the bottom of the WiPG-1000)]
- 3) Now you should be able to see the "Home" page. Click the icon to download and install the wePresent software (MirrorOp Sender app) for Windows (Windows 7/8/10) or Mac (macOS 10.9 and above).



Windows



Mac