# CHAT® 160 | CHATAttach® 160 USB Speakerphones



Group USB speakerphone, powered by ClearOne's market leading HDConference™ audio and optimized for Skype™, enhances any web conferencing, unified communications and video conferencing experience in your personal workspace, huddle rooms, small and mediumsize conference rooms with crystal-clear audio for business-class performance.

# **Acoustic Intelligence**

 First-mic priority intelligently activates only the microphone closest to the person speaking, preventing the amplification of ambient noise and room reflections

# 360-degree Coverage

+ Three built-in microphones create array with 360-degree audio pickup within 10 feet. Large loudspeakers for rich, clear conferencing and audio playback


# **Optimized for Skype**

+ CHAT 160, though optimized for Skype, is compatible with popular web conferencing, unified communications, and video conferencing applications like Cisco WebEx®, Citrix® GoToMeeting, ClearOne Spontania™, Google Hangouts, Skype, Skype for Business and more running on your PC with plug-and-play simplicity

# **Expandable Design**

+ Daisy-chainable design can expand up to two complete speakerphones to cover medium or large rooms. Full speakerphone expandability allows both mic and speaker to cover the entire room along with flexibility of control using any speakerphone



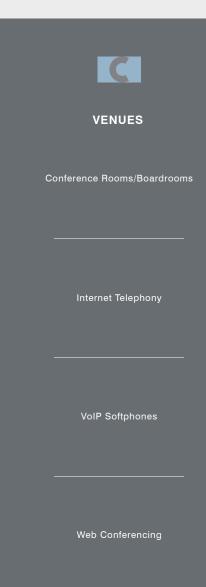



# CHAT® 160 | CHATAttach® 160 Components



CHAT 160 Unit Part # 910-156-200



**USB 2.0 Connection** Cable Part # 910-156-200




Quick Start Guide Part # 800-156-202



6 USB 2 0 Connection Cable Part # 830-156-200







Ready to use out of the box

All the components you need to quickly get up and running, including cabling and Quick-Start Guide.

## PRODUCT SPECIFICATIONS

#### **System Requirements:**

- Microsoft Windows 7, 8, 10 (For any firmware upgrades, use Win7)
- Mac OS
- Skype: 1GHz CPU, 256MB RAM

#### **Connections:**

- Version 2.0 Compatible
- · Type: Mini-B Female

#### **Keyed Connector:**

• Keyed RJ-45 (8-conductor)

#### **Controls:**

- Volume Up
- Volume Down
- · Microphone Mute

### Audio:

#### Speaker:

• Bandwidth: 150 Hz - 15 kHz

• Max Output Level: 85 dB SPL @ 1 foot (0.30 meter)

#### Microphone:

• Bandwidth: 50 Hz - 8 kHz

#### **Environmental:**

### **Operting Temperature:**

• 41 - 104° F (5 - 40° C)

#### **Storage Temperature:**

• 32 - 158° F (0 - 70° C)

#### **Processing:**

- Full Duplex
- Distributed Echo Cancellation (D.E.C.)®
- Noise Cancellation (NC)
- Automatic Level Control (ALC)
- Line Echo Cancellation (LEC) Selectable
- · First-Mic Priority

#### Power:

#### USB:

• 5 VDC @ 500 mA Maximum

#### External:

- Input: 100 240 VAC
- Output: 9 VDC @ 560 mA
- Tip: Power
- Ring: Ground

#### Mechanical:

### Dimensions (W x D x H):

• 7.4" x 7.4" x 1.8" (18.8 cm x 18.8 cm x 4.6 cm)

### Weight:

• 1.17 lbs (0.53 kg)

### **Accessory Part Numbers:**

#### 910-156-251 CHAT 160:

• Single CHAT 160 and Connecting Cable

#### 910-156-251-00 CHATAttach 160:

• Two (2) CHAT 160 Devices, Conecting Cables and Power Supply

# **SALES AND INQUIRIES**

Tel: +1 801.975.7200 TollFree: +1 800.945.7730 TechSales: +1 800.705.2103

Fax: +1 801.303.5711 sales@clearone.com

Tel: +1.800.945.7730 global@clearone.com

Tel: +1.800.945.7730 global@clearone.com

Tel: +1.800.945.7730 global@clearone.com

Tel: +1.800.945.7730 global@clearone.com