


Key Features

4K Ultra HD Resolution | InGlass™ Touch Technology | Built-in Security |
Out-of-Box Collaboration | Intel Unite Certified




Product Description

Featuring 4K Ultra HD resolution and an immersive InGlass™ touchscreen, the ViewSonic® ViewBoard® IFP7560 delivers incredible collaborative capabilities for 21st century boardrooms and classrooms. The highly accurate InGlass touch screen provides an incredibly natural handwriting experience, and allows multiple users to simultaneously write or draw on the 75" screen with their fingers and styluses. With a built-in quad-core processor, as well as versatile connectivity options including multiple HDMI, VGA, RS232, RJ45, and USB ports, this display provides powerful computing for annotation and multimedia playback without the need for a PC. The optional slot-in PC offers additional computing power for intensive interactive applications. The IFP7560 features a VESA-compatible design and can be placed on a wall mount, or on an optional trolley cart for flexible installation in classrooms and corporate meeting rooms. For more detailed information on how ViewSonic ViewBoard displays can best be utilized in a school environment, see our [ViewBoard FAQs](#).

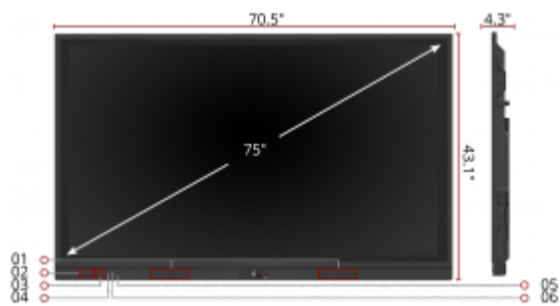


- 01. Internal Speakers
- 02. Menu Controls
- 03. USB 2.0 x2
- 04. HDMI 1.4 In
- 05. MIC
- 06. USB B Touch Port

- 07. VESA® Compatible Wall Mount 800 x 400 mm
- 08. Audio Out 3.5 mm
- 09. SPDIF
- 10. RS232 In
- 11. HDMI Out

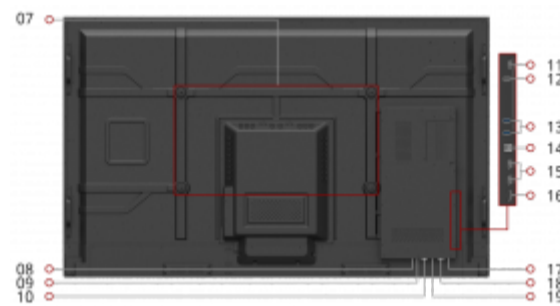

- 12. USB 2.0
- 13. USB 3.0 x2
- 14. USB B Touch Port
- 15. HDMI 2.0 In x2
- 16. Displayport
- 17. Audio In

- 18. VGA In
- 19. Ethernet Lan (RJ45)



75"
DISPLAY

RESOLUTION

20-Point
TOUCH INTERACTIVE

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

LCD Display:

Display Size (in.):	75
Viewable Area (in.):	75
Light Source:	LED
Resolution:	3840 x 2160
Aspect Ratio:	16:9
Static Contrast Ratio:	4,000:1
Backlight Life (Hours):	50,000
Brightness:	350 cd/m2
Response Time (Typical GTG):	8ms
Viewing Angles:	178° horizontal, 178° vertical
Panel Surface:	Anti-glare 7H tempered glass

Networking:

Ethernet LAN:	10/100 Mbps
---------------	-------------

Embedded Player:

OS:	Embedded ViewBoard OS
GPU:	ARM Mali450 MP4
CPU:	ARM Quad Core Cortex A53
CPU Processor Speed:	1.4GHz
Memory:	2GB
Storage:	16GB
Built-in Software:	myViewBoard, Chromium browser, Zoom, ViewBoard Cast

Audio:

Internal Speakers:	10W (x2)
--------------------	----------

Connector:

HDMI 1.4 In(1), HDMI 2.0 In(2), HDMI Out(1), VGA(1), Display Port(1), 3.5mm Audio In(1), 3.5mm Audio Out(1), USB 3.0(2), USB 2.0(3), OPS PC Slot(1), USB B Touch Port(2), RS232(1), Ethernet LAN (RJ45)(1), SDM Slot(1)

Power:

Voltage:	100-240 VAC
Consumption (typical):	397W
Stand-by:	<0.5W

Controls:

On Screen Display:	Input, Volume, Backlight, Audio, Screen, Display, Adjust
Remote Control:	Volume, Channel, Source, Mute, Back, Input, Menu

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	10-90%

Touch:

Touch Technology:	InGlass
Touch Points:	20-Point Touch

Weight (imperial):

Net (lbs):	136.7
Gross (lbs):	177.0

Weight (metric):

Net (kg):	62.0
Gross (kg):	80.3

Dimensions (imperial) (WxHxD):

Packaging (in.):	76.6 x 48.3 x 11.0
Physical (in.):	70.5 x 43.1 x 4.3

Dimensions (metric) (WxHxD):

Packaging (mm):	1945.0 x 1230.0 x 280.0
Physical (mm):	1789.5 x 1094.5 x 108.1

Mount:

VESA Compatible:	800 x 400 mm
------------------	--------------

General:

Warranty: 3-year limited warranty on parts, labor and backlight, onsite warranty

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

PACKAGE CONTENTS: IFP7560 Display, Stylus Pen x 2, Power Cable, Remote Control with Batteries, Quick Start Guide, Camera Plate, USB Cable, HDMI Cable

Regulations: cTUVus, FCC, ENERGY STAR 7.0, Mexico Energy, CE, CB, RoHS, ErP, WEEE

UPC: 766907963618

Accessories:

CD-EW-70-01, CD-EW-70-02, Intel Unite, NMP660, NMP660-S, PD-IFP-001, PD-IFP-002, PD-IFP-003, PD-IFP-004, SW-071, SW-071-2, SW-072, SW-072-2, SW-073, SW-073-2, SW-074, SW-074-2, SW-075, SW-075-2, SW-101, SW-110, SW-111, SW-UP-117, VB-BLF-001, VB-BLF-002, VB-BLF-003, VB-BLM-001, VB-BLM-002, VB-BLM-003, VB-BLM-004, VB-BLW-001, VB-BLW-002, VB-BLW-003, VB-BLW-004, VB-BWS-002, VB-BWS-005, VB-CAM-001, VB-EBL-001, VB-EBM-001, VB-EBS-001, VB-EBT-001, VB-EBV-001, VB-EBV-002, VB-EBW-001, VB-STND-001, VB-STND-002, VB-STND-003, VB-STND-004, VB-STND-005, VB-VIS-001, VB-WKB-001, VBD100, VBH100, VBS100, VPC12-WPO-2, VPC12-WPO-2-S, VPC12-WPO-6, WMK-047-2, WMK-070, myViewBoard for Windows