

Key Features

Ultra HD Resolution | Built-in Multi-Core Media Player with 8GB Storage



| Embedded LAN, Optional Wi-Fi, and Internet Browser | ViewBoard®

Cast Content Sharing Software | Free Bundled vController™ Software



Product Description


The ViewSonic® CDE6510 is a 65" (64.5" viewable) 4K Ultra HD commercial display purpose-built to deliver eye-catching imagery for hotels, restaurants, retail, business, and more. With stunning 3840x2160 resolution, 350-nit high brightness, wide viewing angles, and dual 10W speakers, this display provides immersive, high-impact messaging wherever needed. An embedded Android SOC allows you to install Android apps for rich content broadcasting. In addition to HDMI, DVI, and VGA inputs to connect with various high definition devices, this display utilizes an integrated multi-core processor and 8GB of internal memory, allowing customers to playback multimedia content via USB without the need for a PC. To make life even easier, the bundled vController software offers easy maintenance and intuitive interfaces for remote management via a PC server or laptop, and its flicker-free and blue light filter technologies help provide a comfortable viewing environment.

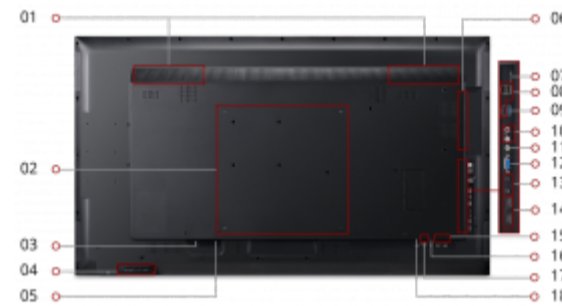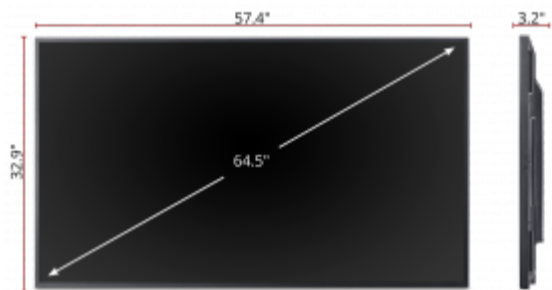


- | | |
|---|------------------------|
| 1. Internal Speakers | 6. OPS Slot |
| 2. VESA® Compatible Wall Mount 400 x 400 mm | 7. Micro SD Reader |
| 3. AC In | 8. USB 2.0 Type A (x3) |
| 4. Menu Controls | 9. USB 3.0 Type A |
| 5. Power Switch | 10. Audio Out |
| | 11. Audio In |

- | |
|--------------------|
| 12. VGA |
| 13. IR In/Out |
| 14. HDMI 2.0 (x2) |
| 15. HDMI 2.0 (x2) |
| 16. DisplayPort In |
| 17. RS232 In/Out |

18. LAN



65"
DISPLAY



3840 x 2160
RESOLUTION



350 cd/m2
BRIGHTNESS

16/7

Contact Sales

-  call: 888.881.8781
-  email: salesinfo@viewsonic.com
-  visit: viewsonic.com

LCD Display:

Display Size (in.):	65
Viewable Area (in.):	64.5
Light Source:	DLED
Resolution:	3840 x 2160
Aspect Ratio:	16:9
Static Contrast Ratio:	4,000:1
Backlight Life (Hours):	30,000
Brightness:	350 cd/m2
Response Time (Typical GTG):	8ms
Bezel Width (mm):	Top 13.9 mm / Right 13.9 mm / Left 13.9 mm / Bottom 14.9 mm
Viewing Angles:	178° horizontal, 178° vertical
Panel Surface:	3H Anti-glare, hard-coating
Operation Rating:	16/7

Embedded Player:

CPU:	Multi-Core ARM - MSD95E1D
Memory:	2GB
Storage:	8GB eMMC
Built-in Software:	OSD / Remote Control

Audio:

Internal Speakers:	10W (x2)
--------------------	----------

Connector:

HDMI 2.0 In(4), VGA(1), Display Port(1), 3.5mm Audio In(1), 3.5mm Audio Out(1), USB 3.0(1), USB 2.0(3), OPS PC Slot(1), RS232(1), RS232 Out(1), Ethernet LAN (RJ45)(1), Micro SD Card Slot(1), IR in(1), IR out(1)

Power:

Voltage:	100-240 VAC +/- 10% Wide Range, 50-60Hz +/-3 Hz
Consumption With Slot-In PC (typical):	229W
Consumption Without Slot-In PC (typical):	165W
Stand-by:	<0.5W

Controls:

On Screen Display:	Picture, Screen, Audio, Configuration 1, Configuration 2, Advanced Option
Remote Control:	Volume, Channel, Source, Mute, Back, Input, Menu

Operating Conditions:

Temperature:	41-104° F (5 - 40° C)
Humidity (non-condensing):	20-80%

Weight (imperial):

Net (lbs):	63.7
Net Without Stand (lbs):	54.7
Gross (lbs):	76.8

Weight (metric):

Net (kg):	28.9
Net Without Stand (kg):	24.8
Gross (kg):	34.8

Dimensions (imperial) (WxHxD):

Packaging (in.):	65.2 x 42.4 x 11.0
Physical Without Stand (in.):	57.4 x 32.9 x 3.2

Dimensions (metric) (WxHxD):

Packaging (mm):	1655.0 x 1078.0 x 280.0
Physical Without Stand (mm):	1458.7 x 834.7 x 81.6

Mount:

VESA Compatible:	400 x 400 mm
Screw Size:	M6
Screw Length (mm):	10

General:

Warranty: Three-year limited warranty on parts, labor and backlight

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

PACKAGE CONTENTS: CDE6510, Remote control, CD User Manual, Quick Start Guide, Power cables, VGA cable, RS232 cable, IR sensor cable, RS232 daisy chain cable

Regulations: UL/cUL, FCC, Energy Star 7.0, UL-MX-CoC, Mexico Energy

UPC: 766907929812

Accessories:

CD-EW-65-01, CD-EW-65-02, NMP-302WX, NMP-302w, NMP012, NMP520-W, NMP520-W-S, NMP520-WX, NMP580-W, NMP620-P10, NMP620-P10X, SC-A25R, STND-034, STND-045, STND-047, SW-040, SW-071, SW-071-1, SW-071-2, SW-072, SW-072-2, SW-073, SW-073-2, SW-074, SW-074-2, SW-075-2, SW-076, SW-077, SW-078, SW-080, SW-090, SW-090-2, SW-090-3, SW-091, SW-091-3, SW-092, SW-092-2, SW-092-3, SW-093, SW-093-2, SW-093-3, SW-094, SW-094-2, SW-094-3, SW-095, SW-096, VB-STND-001, VB-STND-002, VB-STND-003, VB-STND-004, VC10, VCB10, VPC12-WPO, VPC12-WPO-2, VPC12-WPO-6, VPC12-WPO-6-S, WMK-014, WMK-047-2, WMK-051, WMK-070, WMK-071, sc-a25x, sw-014, sw-015